

Natural flue draft gas fired storage water heater



Product details

# TX600



ErP Ready



Low Emissions



**Methane**


Code **TX600**

Price **€ 5.000,00**

**Propane**

Code **TX600P**



Price **€ 5.020,00**

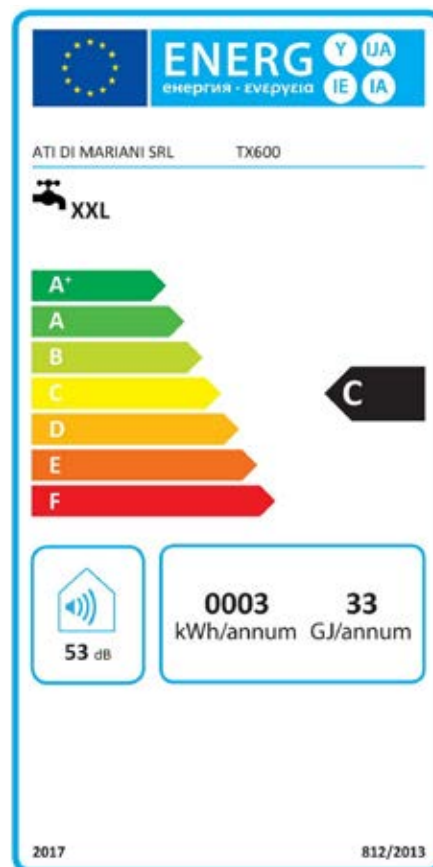

### Main characteristics

- Internal glazing
- Closed-cell polyurethane foam insulation
- Electronic ignition
- Corrosion protection with magnesium anode
- Adjustable thermostat and overheat safety thermostat
- Stainless steel multigas burner, natural gas or propane ready
- Flue gas safety thermostat
- Overpressure safety valve
- Inspection and cleaning flange

Technical data		
Storage capacity	L	580
Nominal input (gross)	kW	27,00
Nominal output (net)	kW	23,63
Warm up time ( $\Delta T = 45^{\circ}\text{C}$ )	min	77
Continuous water at $40^{\circ}\text{C}$	l/h	813
Draw-off capacity single withdrawal*	L	1160
Methane consumption (G20)**	m <sup>3</sup> /h	2,80
Propane consumption (G31)**	kg/h	2,10
Max operating pressure	bar	6
Net weight	kg	246
Connections		
Cold Water Inlet	F	G 1" 1/4
Hot Water Outlet	C	G 1" 1/4
Recirculation	R	G 1" 1/4
Gas Inlet	G	G 1/2"
Exhaust fumes - concentric	S	/
Exhaust fumes - split		$\varnothing 186$
Packaging		
Packages	n.	2
Wooden cage (l x w x h) - (weight)	cm - (kg)	98x98x180 - (285)
Box (l x w x h) - (weight)	cm - (kg)	68x68x250 - (6)

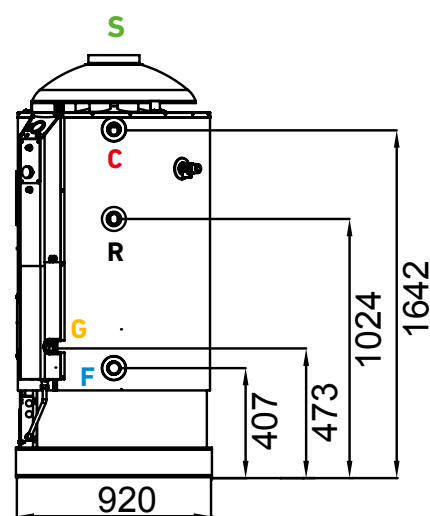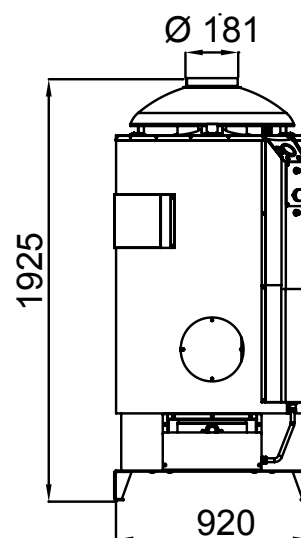

\*Under standard conditions: T in  $15^{\circ}\text{C}$ , T out  $40^{\circ}\text{C}$ , T storage  $65^{\circ}\text{C}$

\*\* Under standard conditions: T in  $15^{\circ}\text{C}$ , 1013 mbar