

Natural flue draft gas fired storage water heater



Product details


TX800



ErP Ready



Low Emissions

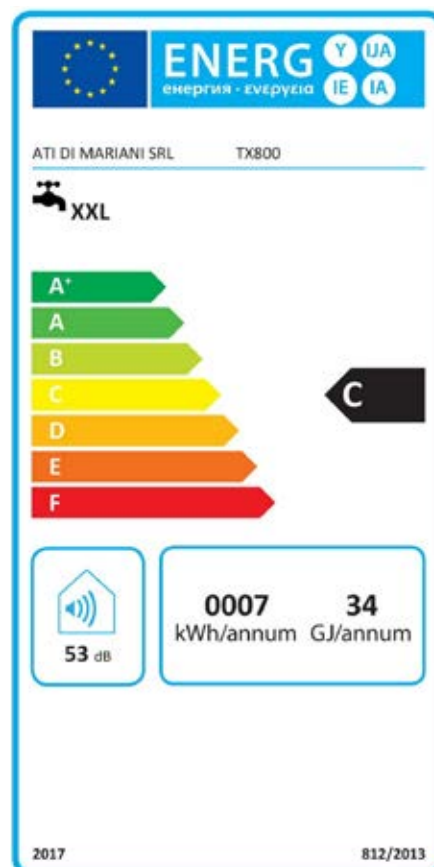

Methane

Code **TX800**

Price **€ 5.550,00**

Propane



Code **TX800P**

Price **€ 5.570,00**

Main characteristics

- Internal glazing
- Closed-cell polyurethane foam insulation
- Electronic ignition
- Corrosion protection with magnesium anode
- Adjustable thermostat and overheat safety thermostat
- Stainless steel multigas burner, natural gas or propane ready
- Flue gas safety thermostat
- Overpressure safety valve
- Inspection and cleaning flange

Technical data		
Storage capacity	L	740
Nominal input (gross)	kW	28,00
Nominal output (net)	kW	25,20
Warm up time ($\Delta T = 45^{\circ}\text{C}$)	min	92
Continuous water at 40°C	l/h	867
Draw-off capacity single withdrawal*	L	1480
Methane consumption (G20)**	m ³ /h	2,90
Propane consumption (G31)**	kg/h	2,20
Max operating pressure	bar	6
Net weight	kg	301
Connections		
Cold Water Inlet	F	G 1" 1/4
Hot Water Outlet	C	G 1" 1/4
Recirculation	R	G 1" 1/4
Gas Inlet	G	G 1/2"
Exhaust fumes - concentric	S	/
Exhaust fumes - split		$\varnothing 186$
Packaging		
Packages	n.	2
Wooden cage (l x w x h) - (weight)	cm - (kg)	98x98x210 - (320)
Box (l x w x h) - (weight)	cm - (kg)	68x68x250 - (6)

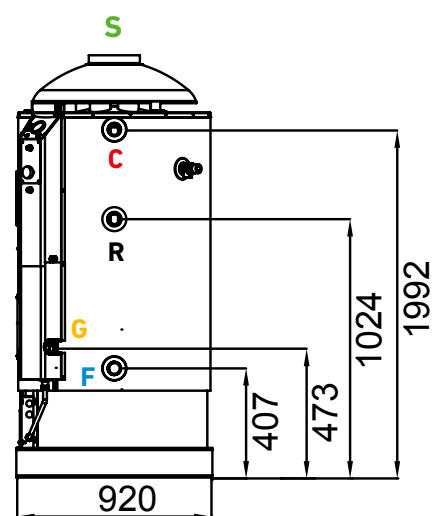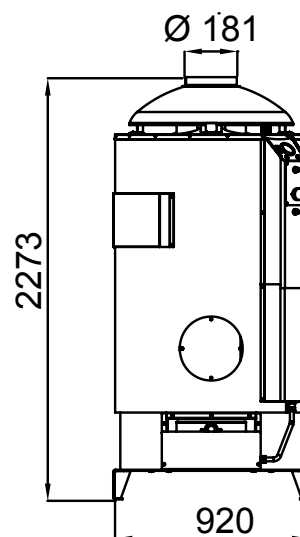

*Under standard conditions: T in 15°C , T out 40°C , T storage 65°C

** Under standard conditions: T in 15°C , 1013 mbar