

Condensing gas fired storage water heater



Product details

# WHC 400




ErP Ready



Low Emissions



Premix Burner

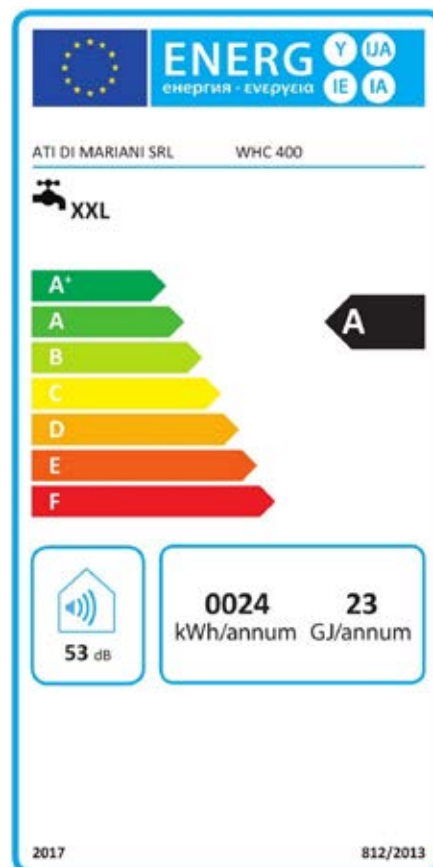

Exhaust kit from page. 30

Code **WHC400**  
Price **€ 5.600,00**

## Main characteristics

- Device operating with ATI original flue kits only
- Internal glazing
- Closed-cell polyurethane foam insulation
- Electronic ignition
- Corrosion protection with magnesium anode
- High efficiency AISI316 steel heat exchanger
- Stainless steel multigas premix burner, natural gas ready
- Possibility of conversion to propane
- Overpressure safety valve
- Inspection and cleaning flange
- Anti-legionella function
- Various ATI flue kits available

Technical data		
Storage capacity	L	395
Nominal input (gross)	kW	25,00
Nominal output (net)	kW	24,50
Warm up time ( $\Delta T = 45^{\circ}\text{C}$ )	min	51
Continuous water at $40^{\circ}\text{C}$	l/h	843
Draw-off capacity single withdrawal*	L	790
Methane consumption (G20)**	m <sup>3</sup> /h	2,70
Propane consumption (G31)**	kg/h	2,10
Max operating pressure	bar	6
Net weight	kg	183
Connections		
Cold Water Inlet	F	G 1" 1/4
Hot Water Outlet	C	G 1" 1/4
Recirculation	R	G 1" 1/4
Gas Inlet	G	G 3/4"
Exhaust fumes - concentric	S	$\varnothing 60/100, \varnothing 80/125$
Exhaust fumes - split		$\varnothing 80 \varnothing 80$
Packaging		
Packages	n.	1
Wooden cage (l x w x h) - (weight)	cm - (kg)	82x110x174 - (203)
Box (l x w x h) - (weight)	cm - (kg)	/

\*Under standard conditions: T in  $15^{\circ}\text{C}$ , T out  $40^{\circ}\text{C}$ , T storage  $65^{\circ}\text{C}$

\*\* Under standard conditions: T in  $15^{\circ}\text{C}$ , 1013 mbar

